

EPP Insulation

This insulation for heating applications consists of 2 half-shells and is made of expanded polypropylene. Due to the half-shell system, the assembly on the already installed heat exchanger is possible.


SWEP accessories meet the same high standards as the company's BPHEs. They are produced according to SWEP's specification by rigorously selected suppliers. The high-quality materials are carefully chosen for compatibility, while the accurate dimensions save you time and money on installation. With SWEP accessories you have the assurance that everything will fit and perform the way the design engineers intended.

For more information, please contact your local SWEP representative.



Technical data	
Max operating temperature	230°F
Thermal conductivity	0.035 BTU in/hr ft² °F
Fire properties	B2 in accordance with DIN4102
Material	Expanded Polypropylene
Specific gravity	2.497 lb/ft³

Only available for units with all connections on one side.

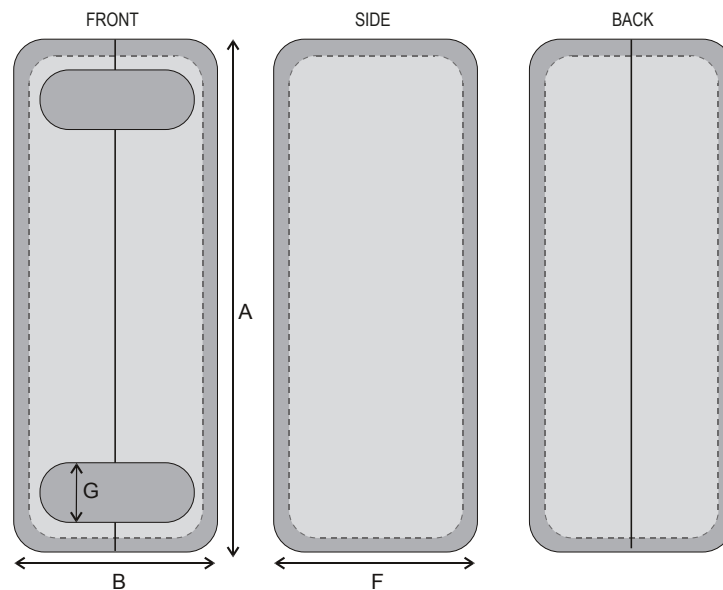

Size	5T	8T	15	10T/12	16/26	25T/28/80
NoP	20/40	20/30/40	20/40	20/40/60/80	40/60/80/100	20/30/40/60/80/100
A (in)	9.92	14.8	20.63	13.78	17.2	23.1
B (in)	5.35	5.35	5.2	7.05	7.05	7.05
F (in)	4.61/6.42	4.61/5.51/6.42	4.65/6.42	4.76/6.61/8.46/10.35	6.3/8.11/9.84/11.65	4.65/5.39/6.5/8.34/10.24/12.05
G (in)	1.57	1.57	1.57	1.97	1.97	1.97
Thickness (in)	1.14	1.14	1.14	1.14	1.14	1.14
Weight lb	0.3/0.5	0.5/0.6/0.7	0.7/0.9	0.6/0.8/0.9/1.1	0.9/1.1/1.3/1.5	1.0/1.1/1.2/1.5/1.7/2.0

www.swep.net

SWEP
A DOVER COMPANY